


# RM 113

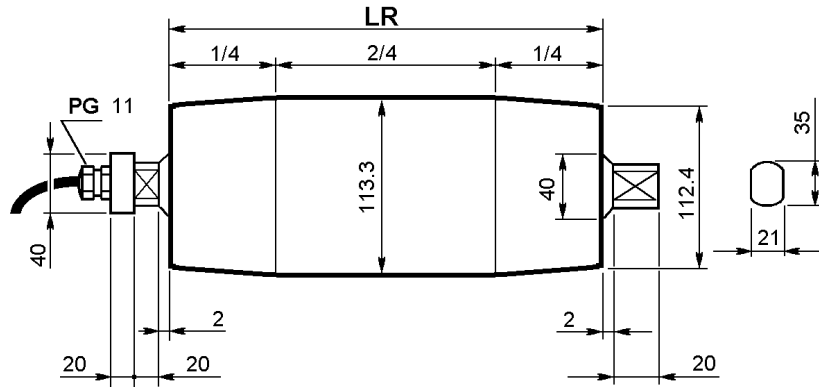

kW HP	Poli Poles n.	V m/s	M Nm	F N	L min. mm	Peso/Weight [kg]																																	
						LR [ mm ]																																	
						312	362	412	462	512	562	612	662	712	762	812	862	912	962	1012	1082	1112																	
<b>Motore trifase / Threephase motor</b>																																							
0.11 0.15	4	0.10	57.8	1023	290	8.2	8.8	9.4	9.7	10.4	11	11.8	12.2	13	14.4	14.9	15.7	16.3	17.1	17.7	18.4	19.3																	
		0.13	44.4	787	290																																		
		0.16	38.5	682	290																																		
		0.23	25.1	445	290																																		
		0.30	19.3	341	290																																		
	6	0.35	16.5	282	290																		8.5	9.1	9.7	10	10.7	11.3	12	12.5	13.3	14.7	15.2	16	16.6	17.4	18	18.7	19.5
		0.28	20.6	365	312																																		
		0.35	16.5	292	312																																		
		0.40	14.4	258	312																																		
0.16 0.22	4	0.10	84	1487	312	8.5	9.1	9.7	10	10.7	11.3	12	12.5	13.3	14.7	15.2	16	16.6	17.4	18	18.7	19.5																	
		0.13	64.6	1144	312																																		
		0.16	52.5	930	312																																		
		0.25	33.6	595	312																																		
		0.30	28	496	312																																		
		0.42	20	354	312																																		
		0.55	15.3	270	312																																		
		0.75	11.2	198	312																																		
		0.91	9.2	183	312																																		
	1.03	8.2	144	312																																			
	6	0.28	30	531	362																		8.5	9.1	9.7	10	10.7	11.3	12	12.5	13.3	14.7	15.2	16	16.6	17.4	18	18.7	19.5
		0.35	24	425	362																																		
		0.40	21	372	362																																		
<b>Motore monofase / Single-phase motor</b>																																							
0.06 0.08	4	0.10	31.5	558	300	8.2	8.8	9.4	9.7	10.4	11	11.8	12.2	13	14.4	14.9	15.7	16.3	17.1	17.7	18.4	19.3																	
		0.23	13.7	243	300																																		
0.11 0.15	6	0.28	20.6	365	312	8.5	9.1	9.7	10	10.7	11.3	12	12.5	13.3	14.7	15.2	16	16.6	17.4	18	18.7	19.5																	
		0.35	16.5	292	312																																		

V	= Velocità del nastro	m/s
M	= Coppia all'asse del motorullo	Nm
F	= Trazione del nastro	N
L	= Larghezza minima del mantello	mm

V	= Belt speed	m/s
M	= Drummotor axis torque	Nm
F	= Belt pull	N
L	= Min. face width	mm